




**TEKGROUP**

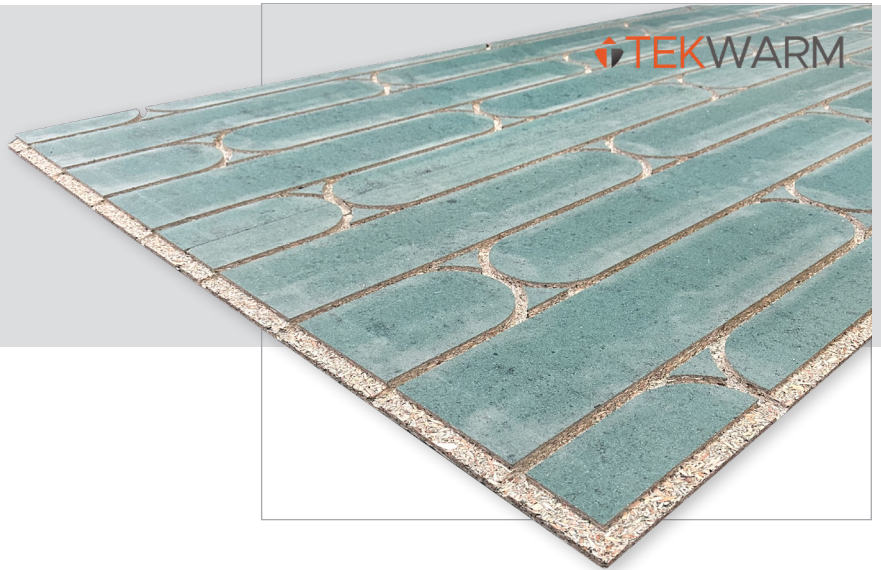

TEKWARM

## CHIP-UFH BOARD

**Moisture resistant routed chipboard, available standard, foiled, or bonded to additional thermal or acoustic insulation.**

Our Chip-UFH Board is highly conductive which allows for an even spread of heat throughout the floor.

A 6mm or 9mm plywood (or Tekwarm Construction Board) should be laid over the top of the routed chipboard depending on the joist spacing and required floor finish.

The board size is 2400mm x 600mm x 22mm, being grooved on one face as required to suit 12mm diameter underfloor heating pipes, with radius returns as standard.

Other routed pipe layouts and patterns are available.

### TEKGROUP

Unit 1 Power Park, Commercial Road,  
Goldthorpe Industrial Estate Rotherham,  
S63 9BL

**T:** 01709 261 007  
[www.thetekgroup.co.uk](http://www.thetekgroup.co.uk)

### INSTALLATION

Tekwarm Chip-UFH Foiled Board is typically installed directly onto floor joists (usually insulated inbetween), utilising standard chipboard screws and joint adhesive.

### FINISHING

A Tekwarm Overlay Board or suitable plywood should be applied prior to the application of any floor finishes.

Tekwarm Overlay Board is installed as a floating floor, plywood should be installed using suitable fixings.

Laminates, hardwood flooring and carpets should be applied using a suitable underlay as per manufactures instructions.

### SUITABLE FOR

Tekwarm Chip-UFH Foiled Board is suitable for new build or retro fit installations, and the standard pattern board is normally available from stock.